



GALVANISED COILS AND SHEETS






CONTENTS

JSW GROUP	04
JSW STEEL LTD.	06
JSW STEEL COATED PRODUCTS LTD.	07
SETTING BENCHMARKS	09
JSW GALVANISED PRODUCTS	12
MANUFACTURING FACILITIES	12
ADVANTAGE JSW	14
THE MANUFACTURING PROCESS	15
PRODUCT SPECIFICATIONS	16
GALVANISED - SOFT	21
(COMMERCIAL, FORMING, DRAWING)	
GALVANISED STRUCTURAL	22
PACKAGING - GALVANISED STEEL	24
RESEARCH AND TESTING FACILITIES	25
THE ULTIMATE TEST	26
SALES OFFICES	27

JSW GROUP



Port



Energy



Steel



Cement



Information Technology

A \$11 billion conglomerate, JSW Group is a part of the O. P. Jindal Group. JSW has set up business facilities in various core sectors of India, with verticals that are exploring innovative and sustainable avenues in steel, energy, infrastructure and cement. The Group is paving the way for India's development as a global superpower.

JSW Steel is India's leading steel producer and among the world's most illustrious steel company. The Group is also leading in every sector that it operates in. By maintaining exemplary operational efficiencies, JSW Energy has grown ten-fold in just three years, while JSW Cement creates the building blocks of India with its environment friendly products. JSW Infrastructure is contributing to the nation's development by providing world class services to clients through state-of-the-art ports, terminals, shipyards and other facilities.

JSW Group is committed to creating more smiles at every step of the journey. JSW Foundation, the Group's CSR and sustainability arm, is in constant pursuit of making life better for communities with its various initiatives in the fields of health, education, livelihood and sports, along with art and culture.


JSW Group is proud to be charting a course to excellence that creates opportunities for every Indian and leads to the creation of a sustainable, dynamic and developed nation.

JSW STEEL LTD.

The flagship company of USD 11 billion JSW Group, JSW Steel is one of India’s leading integrated steel manufacturers with a capacity of 14.3 MTPA. It is one of the fastest growing companies in India with a footprint in over 140 countries. With state-of-the-art manufacturing facilities located in Karnataka, Tamil Nadu and Maharashtra, it is recognized for its innovation and quality. JSW offers a wide gamut of steel products that includes Hot Rolled, Cold Rolled, Bare & Pre-painted Galvanized & Galvalume®, TMT Rebars, Wire Rods and Special Steel. JSW Steel continues to enhance its capabilities to meet the rapidly changing global market needs. To stay on the leading edge of technical advancement, JSW has entered into technological collaboration with JFE Steel Corp, Japan to manufacture high strength and advanced high strength steel for the automobile sector. JSW Steel has also entered into a joint venture with Marubeni-Itochu Steel Inc. Tokyo, to set up a state-of-the-art steel processing center. To strengthen its global network, the Company has also acquired a Pipe and Plate making steel mill in Baytown, Texas in USA. By 2025, JSW Steel aims to produce 40 million tons of steel annually.

JSW STEEL COATED PRODUCTS LTD.


JSW Steel Coated Products Limited is 100% subsidiary company of JSW Steel, having state-of-the-art manufacturing facilities in the state of Maharashtra. JSW Steel Coated Products Ltd. is India’s largest manufacturer and exporter of Coated Steel as well as Colour Coated Steel. The production facilities, Tarapur and Vasind Works, are located in the vicinity of major ports. The company’s Kalmeshwar Works is centrally located near Nagpur to serve across regions. JSW is an ISO 9001: 2008 Certified Organization and the first licensee producer for Galvalume® in India. The Tarapur plant is specialized in manufacturing Ultra-Thin Coated Products. The company is also a manufacturer of appliance grade colour coated products. JSW’s Kalmeshwar Works is the first producer of Galvanized and Colour Coated Steel in India. JSW also has introduced indigenously manufactured Pre-Coated Metal & Vinyl Coated Metal, for the first time in India, as it focuses on the Appliance Industry.

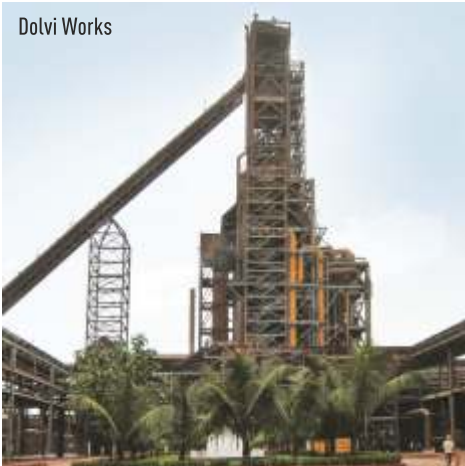

Blast Furnace - IV



Vijayanagar Works

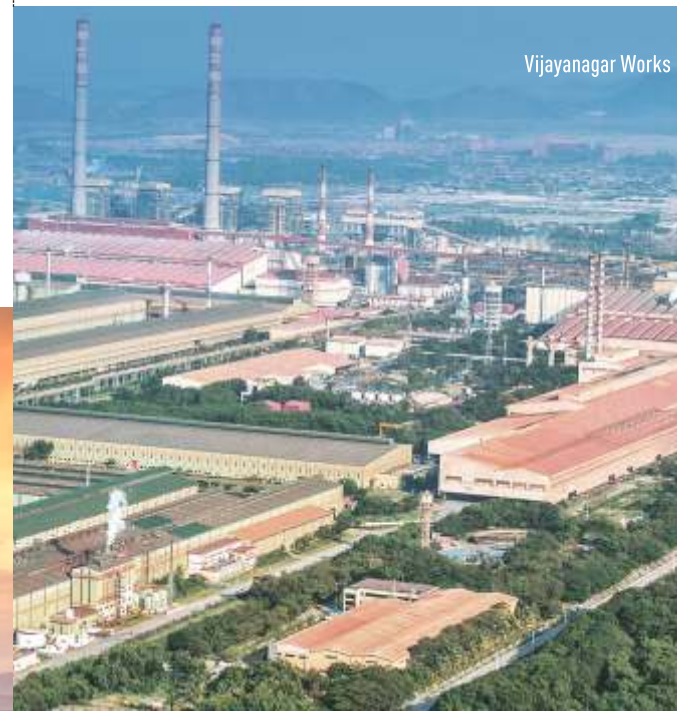

SETTING BENCHMARKS

- First continuous annealing line in India
- Widest Cold Rolling Mill (upto 1870 mm width)
- India's Largest Coated Steel producer
- First Licensee Galvalume® producer in India
- JSW Steel Salem Works is the largest integrated alloy and special steel plant in India
- Widest Hot Strip Mill in India: 25.4 x 2150 mm
- India's Most Modern and Largest Vertical Caster - 300/260/220 x 2200 mm
- India's Largest Blast Furnace - 3.2 MTPA at Vijayanagar
- India's only Multi-Radii Bloom Caster (12/16/30 m) operational at Salem Works
- ZERO EFFLUENT discharge for greener & cleaner environment
- 1.5 million trees planted at Vijayanagar Works, transforming the area into a green oasis

Steel Melting Shop





INDIA'S LARGEST COATED
STEEL PRODUCER.

JSW GALVANISED PRODUCTS

JSW's Galvanised Coils and Sheets are produced through the Mills at Vasind, Tarapur and Kalmeshwar. JSW's Galvanised products are manufactured in Structural, Pipes and Tubes, High Tensile grades, conforming to JIS, EN, ASTM and IS standards. Dimensional accuracy is guaranteed by an automatic thickness control system using advanced numerical models. The downstream plants source HR steel coils from Dolvi Works.



THE MANUFACTURING FACILITIES

VASIND WORKS

The Vasind plant focuses on JSW branded value-added steel products. It sources HR Steel Coils from the Dolvi and Vijayanagar plants to manufacture value-added, branded steel products such as galvanised steel, plain and corrugated products as well as colour coated products. Vasind works is located 70 kms from Mumbai. The journey that started in 1982 with the commissioning of a 20 Hi cold rolling mill has turned into a full-fledged complex with cold rolling, galvanizing and colour coating facilities. Galvanised steel from Vasind is a market leader in both domestic and international markets.

TARAPUR WORKS

JSW Steel Tarapur works marks one of the first milestones for JSW Steel. The plant was acquired by Late Shri O. P. Jindal on 9th November 1982, from Piramal Steel Ltd. and was renamed as Jindal Iron and Steel Company. The plant offers coated products catering to several sectors. Tarapur plant specializes in galvanizing, Galvalume® and colour coated steel products.

It sources coils from the Vijayanagar and Dolvi plants to manufacture value-added branded steel products.



KALMESHWAR WORKS

JSW Steel Kalmeshwar works is an integral unit for production of coated products with MTPA production. The plant is located 30 kms from Nagpur and is strategically located to cater needs in all regions. The plant has a pickling line, two rolling mills, two galvanising lines, two colour-coating lines, a Galvalume® line, six slitting and seven cut-to-length lines, two profiling lines and a tile profiling line. The strict adherence to standards of excellence in quality has seen the Kalmeshwar plant attain the ISO 9001 and ISO 14001 certifications.



JSW Vishwas is the premium galvanised sheet manufactured by JSW. Introduced in the year 2002, the brand has become synonym for quality and durability. Earlier known as Jindal Vishwas, it was rebranded as JSW Vishwas in 2010, to align with the corporate brand identity. The umbrella logo of JSW Vishwas symbolizes the trust that the millions have placed on the product. The huge promise of the JSW Vishwas brand is sustained by providing consistent quality product to the customers. Perfect weight and uniform coating throughout the surface area of the sheet are inherent quality of the genuine JSW Vishwas sheets. JSW Vishwas sheets when evaluated on life cycle cost basis, with competing products on factors like durability, ease of installation, maintenance, resale value, prove to be most favourable choice of the masses.


ADVANTAGE JSW

- Superior quality steel
- Excellent corrosion protection
- Formability
- Easy to install and maintenance free
- Environment friendly



THE MANUFACTURING PROCESS

VASIND / TARAPUR / KALMESHWAR

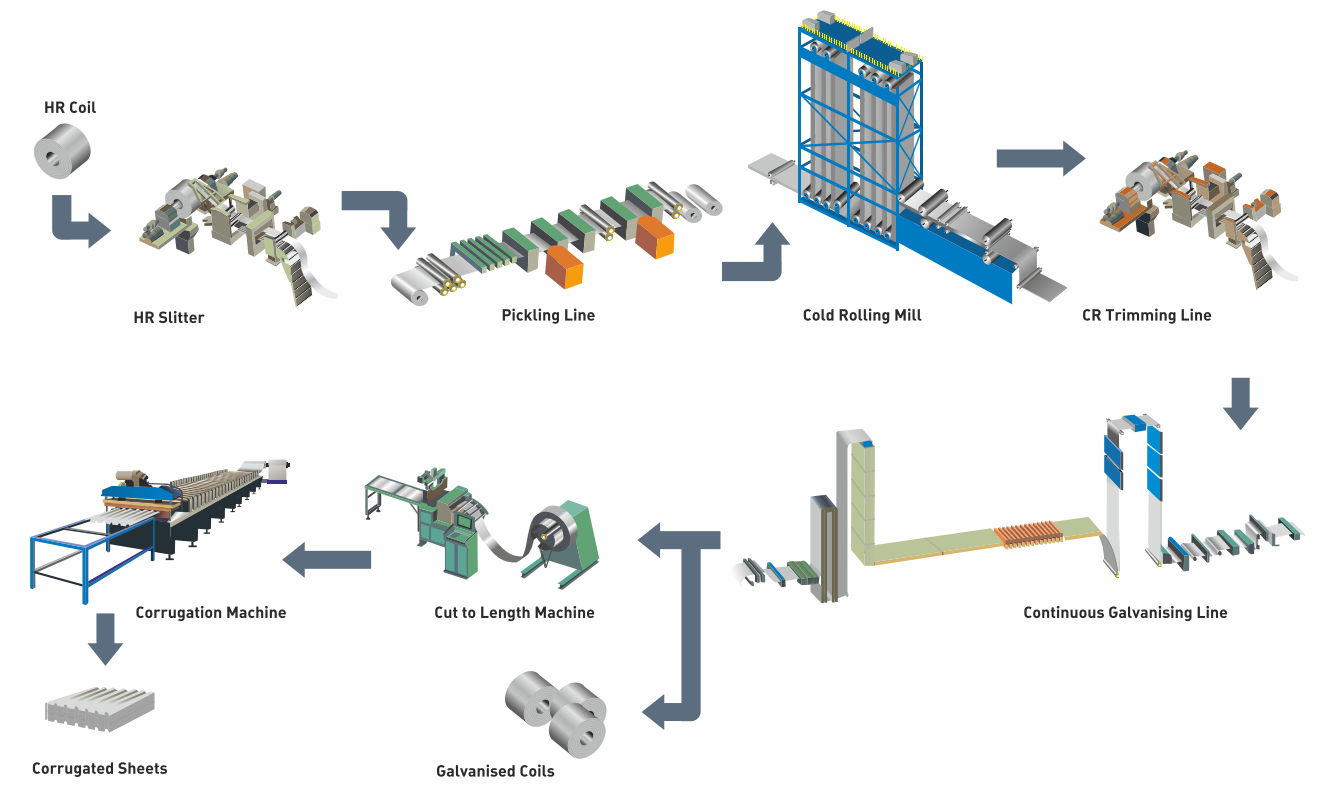

PRODUCT SPECIFICATIONS

SPECIFICATIONS AND THICKNESS

Plant	Grade	Cold Treatment	CR_Thick Min. (MM)	CR_Thick Max. (MM)	Width Min. (MM)	Width Max. (MM)
Vasind	CS (Soft)	STL/ NSTL	0.225	1.55	50	1335
		STL/ NSTL/ SPM	0.235	1.55	50	1335
	CH (Hard)	NSTL	0.25	0.75	50	1335
	DX (YS 310 Max.)	STL/ NSTL/ SPM	0.4	1.55	50	1335
	DD (YS 260 Max.)	STL/ NSTL/ SPM	0.4	1.55	50	1335
	ST (YS 340 Min.)	STL/ NSTL/ SPM	0.4	1.55	50	1335
Tarapur	CS (Soft)	STL/ NSTL	0.223	0.3	680	1250
		STL/ NSTL/ SPM	0.25	0.3	680	1250
		STL/ NSTL/ SPM	0.3	2.5	50	1335
	CH (Hard)	NSTL	0.09	0.143	750	920
		NSTL	0.143	0.22	750	1000
		NSTL	0.223	0.3	695	1250
		NSTL/ SPM	0.3	1.2	50	1335
	DX (YS 310 Max.)	STL/ SPM	0.6	1.2	50	1335
	ST (YS 320 Min.)	STL/ SPM	0.35	2.5	50	1335
Kalmeshwar	CS (Soft)	STL/ SPM	0.229	0.279	399	1005
			0.279	0.479	399	1250
			0.479	3.15	79	1270
	CH (Hard)	NSTL	0.119	0.16	839	915
			0.16	0.229	839	1005
			0.229	0.239	399	1220
			0.239	0.279	399	1235
		NSTL/ SPM	0.279	0.329	399	1235
			0.329	0.379	79	1235
			0.379	0.98	79	1335
	DX (YS 310 Max.)	STL/ SPM	0.229	0.279	399	1005
			0.279	0.479	399	1250
			0.479	3.15	79	1270
	ST (YS 340 Min.)	STL/ NSTL/ SPM	0.371	0.8	79	1250

ZINC COATING CAPABILITY

Plant	CR_Thick Min. (MM)	CR_Thick Max. (MM)	Zn Coating GSM Min.	Zn Coating GSM Max.
Vasind	0.299	0.399	70	275
	0.4	0.449	70	275
	0.45	0.599	70	310
	0.6	1.55	70	350
Tarapur	0.09	0.145	90	120
	0.146	0.229	90	183
	0.23	0.299	90	220
	0.3	0.399	90	275
	0.4	0.45	90	275
	0.451	0.6	90	310
	0.601	1.1	90	400
	1.101	2.5	90	700
Kalmeshwar	0.119	0.16	79	120
	0.161	0.379	79	180
	0.38	0.7	79	275
	0.701	1.45	79	450
	1.451	3.15	79	550

COIL WINDING

Plant	CR_Thick Min. (MM)	CR_Thick Max. (MM)	Zn Coating GSM Min.	Zn Coating GSM Max.	Winding Type	
					Soft	Hard
Vasind	0.229	1.55	70	180		
Tarapur	0.25	0.3	90	190	Straight / Staggered	Staggered
	0.3	0.35	90	215	Straight	Staggered
	0.35	0.45	90	275	Straight	Staggered
	0.45	0.54	90	310	Staggered	Staggered
	0.54	0.7	90	350	Staggered	Staggered
	0.7	1.2	90	400	Staggered	Staggered
	1.2	2.5	90	550	Staggered	Staggered
Kalmeshwar	No Straight Wind					

PRODUCT SPECIFICATIONS

THICKNESS TOLERANCE

Plant	CR_Thick Min. (MM)	CR_Thick Max. (MM)	Thickness Delta MM
Vasind	0.225	0.4	0.025
	0.401	0.6	0.03
	0.601	1.2	0.04
	1.201	1.63	0.06
Tarapur	0.09	0.179	0.022
	0.18	0.299	0.026
	0.3	0.499	0.03
	0.5	0.799	0.03
	0.8	1.199	0.04
	1.2	1.499	0.06
	1.5	2.5	0.07
Kalmeshwar	0.119	0.179	0.014
	0.18	0.299	0.016
	0.3	0.499	0.02
	0.5	1.499	0.03
	1.5	1.999	0.04
	2	2.499	0.07
	2.5	3.15	0.08



WIDTH TOLERANCE

Plant	Width Min. (MM)	Width Max. (MM)	Width Delta MM
Vasind	40	625	0.3
	626	805	0.3
	806	1335	0.5
Tarapur	50	680	0.5
	681	1335	5
Kalmeshwar	79	805	0.5
	805	1335	1

LENGTH TOLERANCE

Plant	Width Min. (MM)	Width Max. (MM)	Length Min. (MM)	Length Max (MM)	Length Delta
Vasind	199	625	600	1000	1
	626	805	1001	2500	2
	806	1335	2501	5000	3
Tarapur	500	749	500	4900	5
	750	1000	500	4900	5
	1001	1335	1500	4900	5
Kalmeshwar	199	1335	399	6000	1



PASSIVATION

Plant	Passivation	CR_Thick Min. (MM)	CR_Thick Max. (MM)
Vasind	CR6/CR3/NIL	>0.225	≤1.55
Tarapur	AFP;CTOC	>0.235	≤2.5
	CR3/ NIL	>0.235	≤2.5
	CR6	≥0.09	≤2.5
Kalmeshwar	AFP	>0.171	≤0.950
	CR3/ NIL	>0.379	≤3.150
	CR6	0.119	≤3.150

COIL ID CAPABILITY

Plant	CR_Thick Min. (MM)	CR_Thick Max. (MM)	Coil ID MM
Tarapur	0.09	0.34	508
Tarapur	0.35	1.00	508/610
Tarapur	1.01	2.50	508
Vasind	0.225	1.55	610
Kalmeshwar	0.229	3.15	610



GALVANISED - SOFT (COMMERCIAL, FORMING, DRAWING)

Specification	Grade	Chemical Composition (Values are in %)											Mechanical Properties								
		C	Mn	Si	P	S	Al	Cu	Ni	Cr	Mo	V	Cb	Ti	N	B	Yield Strength (Mpa min.)	Tensile Strength (Mpa min.)	%Elongation	Gauge Length (mm)	Direction (L/T)
ASTM 653/A Low Carbon	CS Type A	0.1	0.6		0.03	0.035		0.2	0.2	0.15	0.06	0.008	0.008	0.025			170/380		>20	50 GL	L
	CS Type B	0.02 - 0.15	0.6		0.03	0.035		0.2	0.2	0.15	0.06	0.008	0.008	0.025			205/380		≥20	50 GL	L
	CS Type C	0.08	0.6		0.1	0.035		0.2	0.2	0.15	0.06	0.008	0.008	0.025			170/410		≥15	50 GL	L
	FS Type A	0.1	0.5		0.02	0.035		0.2	0.2	0.15	0.06	0.008	0.008	0.025			170/310		≥26	50 GL	L
	FS Type B	0.02 - 0.10	0.5		0.02	0.03		0.2	0.2	0.15	0.06	0.008	0.008	0.025			170/310		≥26	50 GL	L
	DDS	0.06	0.5		0.02	0.025	0.010 min	0.2	0.2	0.15	0.06	0.008	0.008	0.025			140/240		≥32	50 GL	L
JIS G 3302	EDDS	0.02	0.4		0.02	0.02	0.010 min	0.2	0.2	0.15	0.06	0.1	0.1	0.15			105/170		≥40	50 GL	L
	SGCC	0.12	0.6		0.04	0.04															
	SGCH	0.15	0.6		0.05	0.05													36	80 GL	L
	SGCD1	0.12	0.5		0.04	0.04											270		38	80 GL	L
	SGCD2	0.1	0.45		0.03	0.03											270		40	80 GL	L
	SGCD3	0.08	0.45		0.03	0.03											270				L
IS 277 : 2003 / IS 513 : 2008 (GI)		0.15	0.6		0.05	0.035											280		28	50	T
	D	0.12	0.5		0.4	0.035											240		31	50	T
	DD	0.1	0.45		0.025	0.03											220		35	50	T
	EDD	0.08	0.4		0.02	0.03											210		37	50	T
	(AL Killed)																				T
	EDD (IF)	0.06	0.25		0.02	0.02								0.15			190		40	50	T
EN 10327	DX51D	0.12	0.6	0.5	0.1	0.045								0.3					22	80 GL	T
	DX52D																140-300		26	80 GL	T
	DX53D																140-260		30	80 GL	T
	DX54D																120-220		36	80 GL	T
AS 1397	G1	0.12			0.04	0.035															
	G2	0.1			0.03	0.03													30	27	T
	G3	0.08			0.02	0.025													35	32	T

GALVANISED STRUCTURAL

SpecificationGrade	C	Chemical Compostion (values are in %)															Mechanical Properties				
		Mn	Si	P	S	Al	Cu	Ni	Cr	Mo	V	Cb	Ti	N	B	Yield	Strength (Mpa.min.)	Tensile Strength	% Elongation (Mpa.min.)	Guage length (mm)	Direction (L/T^)
ASTM 653/A Structural	GradeSS 33 [230]	0.2	-	-	0.040	0.040	-	0.200	0.200	0.150	0.060	0.008	0.008	0.025	-	-	230	310	20	50GL	L
	GradeSS 37 [255]	0.2	-	-	0.100	0.040	-	0.200	0.200	0.150	0.060	0.008	0.008	0.025	-	-	255	360	18	50GL	L
	GradeSS 40 [275]	0.25	-	-	0.100	0.040	-	0.200	0.200	0.150	0.060	0.008	0.008	0.025	-	-	275	380	16	50GL	L
	Grade 50 [340]class 1	0.4	-	-	0.200	0.040	-	0.200	0.200	0.150	0.060	0.008	0.008	0.025	-	-	340	450	12	50GL	L
	Grade 50 [340]class 2	0.4	-	-	0.200	0.040	-	0.200	0.200	0.150	0.060	0.008	0.008	0.025	-	-	340	-	12	50GL	L
	Grade 50 [340]class 3	0.5	-	-	0.040	0.040	-	0.200	0.200	0.150	0.060	0.008	0.008	0.025	-	-	340	480	12	50GL	L
	Grade 80 [550]	0.20	-	-	0.040	0.040	-	0.200	0.200	0.150	0.060	0.008	0.015	0.025	-	-	550	570	-	50GL	L
ASTM 653/A Structural-HSLAS Type A	40[275]	0.20	1.20	-	-	0.035	-	-	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	275	340	22	50GL	L
	20[340]	0.20	1.20	-	-	0.035	-	0.200	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	340	410	20	50GL	L
	60[410]	0.20	1.35	-	-	0.035	-	0.200	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	410	480	16	50GL	L
	70[480]	0.20	1.65	-	-	0.035	-	0.200	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	480	550	12	50GL	L
	80[550]	0.20	1.65	-	-	0.035	-	0.200	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	550	620	10	50GL	L
ASTM 653/A Structural-HSLAS Type B	40[275]	0.15	1.20	-	-	0.035	-	-	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	275	340	24	50GL	L
	20[340]	0.15	1.20	-	-	0.035	-	0.200	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	340	410	22	50GL	L
	60[410]	0.15	1.20	-	-	0.035	-	0.200	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	410	480	18	50GL	L
	70[480]	0.15	1.65	-	-	0.035	-	0.200	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	480	550	14	50GL	L
	80[550]	0.15	1.65	-	-	0.035	-	0.200	0.200	0.150	0.160	0.01 min.	0.005 min.	0.01 min.	-	-	550	620	12	50GL	L
JIS G 3302	SGC 340	0.25 max.	0.170 max.	-	0.10 max.	0.035 max.	-	-	-	-	-	-	-	-	-	-	245	340	20	80GL	L
	SGC 400	0.25 max.	0.170 max.	-	0.10 max.	0.035 max.	-	-	-	-	-	-	-	-	-	-	295	400	18	80GL	L
	SGC 440	0.25 max.	0.170 max.	-	0.20 max.	0.035 max.	-	-	-	-	-	-	-	-	-	-	335	440	18	80GL	L
	SGC 490	0.25 max.	0.170 max.	-	0.20 max.	0.035 max.	-	-	-	-	-	-	-	-	-	-	365	490	16	80GL	L
	SGC 570	0.25 max.	0.170 max.	-	0.20 max.	0.035 max.	-	-	-	-	-	-	-	-	-	-	560	570	-	80GL	L
EN 10326 S220 GD	0.20	1.70	0.60	0.100	0.045	-	-	-	-	-	-	-	-	-	-	-	220	300	20	80GL	L
	S250 GD																250	330	19	80GL	L
	S280 GD																280	360	18	80GL	L
	S320 GD																320	390	17	80GL	L
	S350 GD																350	420	16	80GL	L
	S550 GD																550	560	-	80GL	L
AS 1397	G 250	0.12	0.50	-	0.040	0.035	-	-	-	-	-	-	-	-	-	-	250	320	25	22	L
	G 300	0.30	1.60	-	0.100	0.035	-	-	-	-	-	-	-	-	-	-	300	340	20	18	L
	G 350	0.30	1.60	-	0.100	0.035	-	-	-	-	-	-	-	-	-	-	350	420	15	14	L
	G 450	0.20	1.20	-	0.040	0.030	-	-	-	-	-	-	-	-	-	-	450	480	10	9	L
	G 500	0.20	1.20	-	0.040	0.030	-	-	-	-	-	-	-	-	-	-	500	520	8	7	L
	G 550	0.20	1.20	-	0.040	0.030	-	-	-	-	-	-	-	-	-	-	550	550	2	2	L





PACKAGING - GALVANISED STEEL

JSW offers its products with effective packaging as per customer requirements and in compliance with international norms. Emphasis is placed to ensure durability, prevention of any damage during transportation and better storage. JSW with its years of experience and regular benchmarking with various national and international companies, endeavours to improvise packaging in accordance with changing customer needs.

JSW has a stringent procedure for evaluating the competency level of suppliers for packaging material. Material quality is verified at the well-equipped and sophisticated JSW laboratory before offering for use.



The packing requirements for export and domestic markets are different. However, the type of packaging is determined in consideration of the following points:

- Customer needs
- Duration of transportation
- Environmental conditions during transit
- Handling during transit
- Handling at customer's premises
- Storage practices
- International regulation on package material

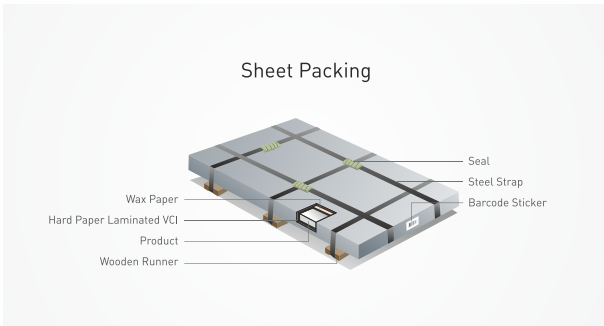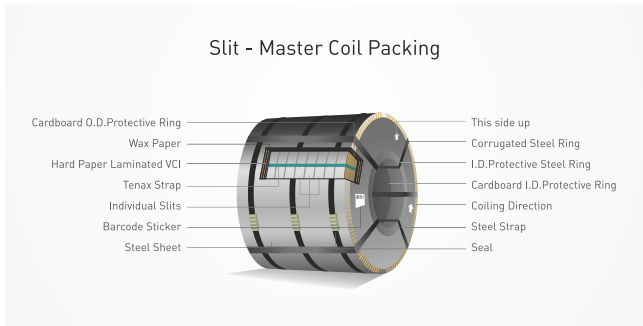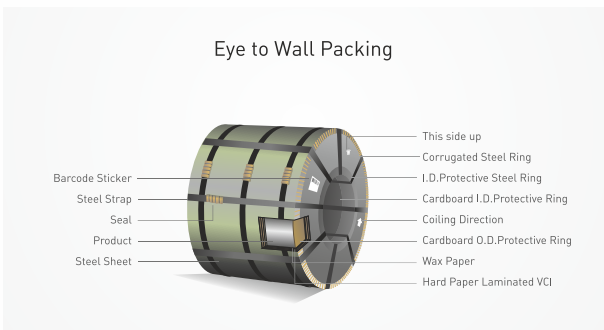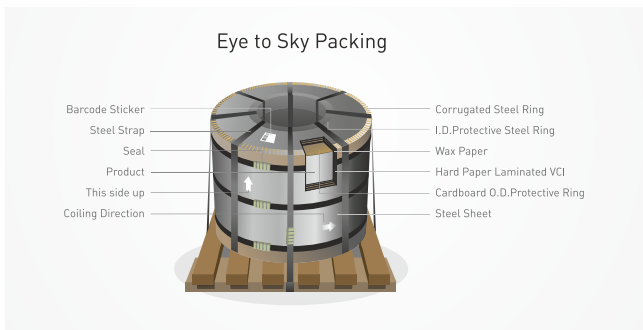

MARKING

Marking, in concept, leads to product accountability and verification at the time of production, transportation and delivery. Considering the vast product range at JSW, labelling practices ensure a foolproof identification and traceability.

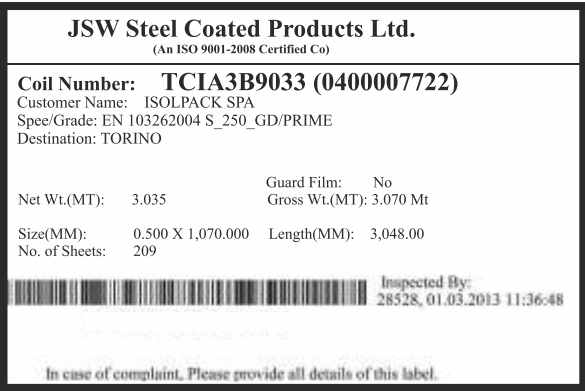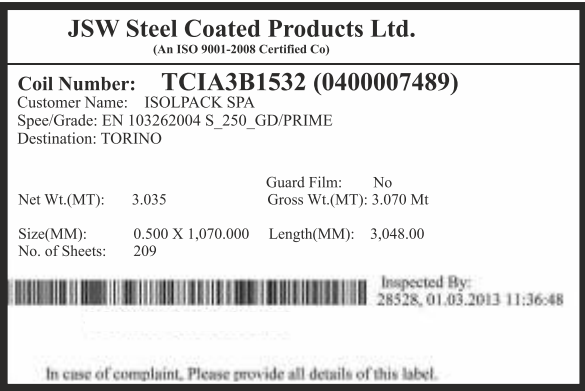

RESEARCH AND TESTING FACILITIES

- Metallurgical Microscope
- Karl Fischer Titrator
- Portaspec for Surface Chrome
- Muffle Furnace
- Computerized UTM
- Roughness Tester
- Vicker's Hardness Tester
- Lock Former
- Salt Spray Chamber
- Digital Hardness Tester
- Salt Spray Chamber
- Optical Emission Spectrometer
- Atomic Absorption Spectrometer
- Low Magnification Microscope
- Scratch Resistance Test
- Pencil Hardness Test
- Bend Test
- Accelerated Corrosion Test
- Methyl Ethyl Ketone (MEK) Test
- Dry Film Thickness Test





THE ULTIMATE TEST

Galvanised Coils are used in a variety of applications

- Automobile
- Roofing & Cladding
- Ducting
- Purlins / PEB
- Panels
- Pipes & Tubes
- General Engineering

SALES OFFICES

AHMEDABAD

410, Abhishilp Complex, Near Keshavbag Party Plot,
Manasi Cross Road, Satellite, Ahmedabad - 380 015
Tel.: 079-40029508, 40029510, 40029509

BENGALURU

The Estate,
3rd Floor, West Wing, 121,
Dickenson Road, Bengaluru - 560 042
Tel : 080-42448888

CHENNAI

Fagun Mansion, 5th Floor,
New No.74, Old No.26, Ethiraj Salai, Egmore,
Chennai - 600 008
Tel.: 044-28297420, 28297422

COIMBATORE

T. V. Swamy Road (West), Coimbatore - 641 002
Tel.: 0422-2541870

DELHI

Thapar House, Janpath, New Delhi - 110 001
Tel.: 011-46050000

FARIDABAD

Plot No. 161, Sector 24, Faridabad - 121 004, Haryana
Tel.: 0129-2239248, 2232387

NOIDA

14A, Industrial Area, Buland Shar Road,
Ghaziabad - 201 009
Tel.: 0120-3262875, 2867142

GUWAHATI

106, 3rd Floor, Meer Market, Maszid Lane, Kamarpatty,
Guwahati - 781 001
Tel.: 0361-2730054

HYDERABAD

7th Floor, Surya Towers, 105, Sardar Patel Road,
Secunderabad - 500 003
Tel.: 040-27846669/79

INDORE

3rd Floor, Lakshya Badgara, 13/1,
New Palasia, Near Curewell Hospital, Indore - 452 001
Tel.: 0731-2532156/57/58/59, 4043613

JAIPUR

Evershine Tower, F-1, 705, 7th floor,
Amarpali Circle, Vaishali Nagar, Jaipur - 302 021
Tel: 0141 4026760/62/63/64

KANPUR

Room No.105, Ratan Esquire, Chunniganj,
Kanpur - 208 001
Tel.: 0512-3271907

KOCHI

Mitsun Enterprise, 30/1854 B4, 1st Floor, Ponnurunni
Road, Chalikkavattom Junction, Vytilla P.O.,
Kochi - 682 019
Tel.: 0484-4026392/ 4063294

KOLKATA

Godrej Waterside, 10th floor, Tower - 1, Unit No. 1003,
Block -DP, Plot -5, Sector V, Salt Lake City, Kolkata - 700 091
Tel : {033} 40002020
Fax: {033} 40002021

LUDHIANA

109, Modelgram, Near Kochar Market, Opp. Malwa
School, Ludhiana - 141 002
Tel.: 0161-6578944, 6450816

MUMBAI

Grande Palladium, 6th Floor, 175,
CST Road, Kalina, Santacruz (East),
Mumbai - 400 098
Tel.: 022-61871000

NAGPUR

Poonam Plaza, Palm Road, Civil Lines, Nagpur-440 001
Tel: 0712- 2520333

PATNA

1, Tilak Nagar East, Behind Patna Diesel, Kankarbagh,
Patna - 800 020
Tel: 08002230517

PUNE

2nd Floor, Mahendra Chambers, Mayfair Building A,
Dhole Patil Road, Pune - 411 001
Tel.: 020-64104547, 27111427

RUDRAPUR

Plot No. 264, By Pass Road, Village Kishanpur, Kichha,
District Udam Singh Nagar Uttrakand - 263 148
Tel.: 05944-263290